


Kohler Decision-Maker 550

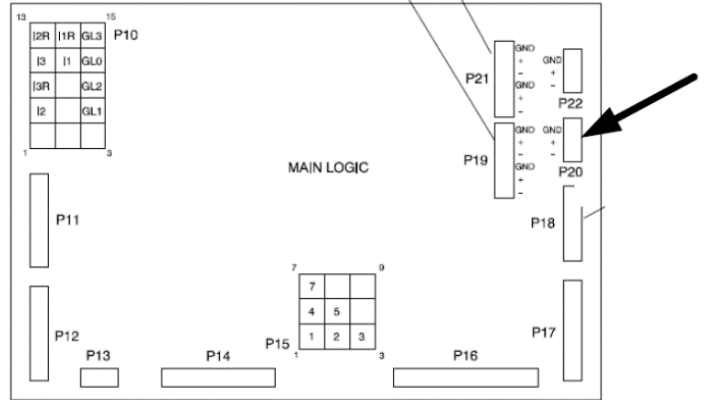

Generac Gateway Side Termination	Description	Wire Color	Customer Side Terminations
TB1 V+	DC+	Red	TB3-4 thru TB3-6 (Wire 42A)*
TB1 V-	DC-	Black	TB3-7 thru TB3-11 (Wire 2)*
TB1 A	Data +	Orange/White	P20/+
TB1 B	Data -	White/Orange	P20/-
TB1 GND	Data GND	White/Blue	P20/GND
Harness Relay #1	COM	Blue	TB1-1(Wire 3)
	N/O	White / Blue	TB1-2(Wire 4)

To update Modbus settings local programming mode will need to be by enabled. Then confirm the below settings are configured by

- (1) Navigating to Menu 13–Communications
- (2) At protocol choose MODBUS
- (3) Confirm Modbus Online is Yes
- (4) Confirm connection Type Single is Yes
- (4) Confirm Primary Port RS485 is Yes
- (5) Confirm Address is 1
- (6) Confirm Baud Rate is 9600

If different settings need to be used, please contact support.

*If MODEM and signal lights turn off and data is lost after gen crank, this can indicate a brief loss of power. To correct, ensure red and black wires are connected directly to the battery posts.

