



# Cummins PCC 2.X/3.X



2.X / 2300  
Control Board



3.X / 3300  
Control Board

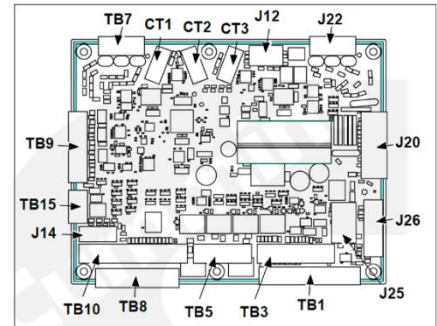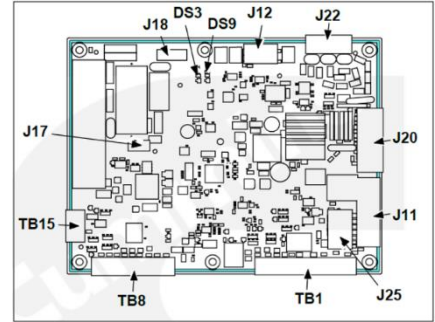

Generac Gateway Side Termination	Description	Wire Color	Customer Side Terminations
TB1 V+	DC+	Red	TB1-5*
TB1 V-	DC-	Black	Ground Terminal*
TB1 A	Data +	Orange/White	TB15-3
TB1 B	Data -	White/Orange	TB15-4
TB1 GND	Data GND	White/Blue	TB15-1
Harness Relay #1	COM	Blue	TB1-10
	N/O	White / Blue	TB1-11

Expected Comm Settings:

Address: 2

Baud Rate: 9600

If different settings are required, please contact support.

\*If MODEM and signal lights turn off and data is lost after gen crank, this can indicate a brief loss of power. To correct, ensure red and black wires are connected directly to the battery posts.

