


# CAT EMCP II and II+

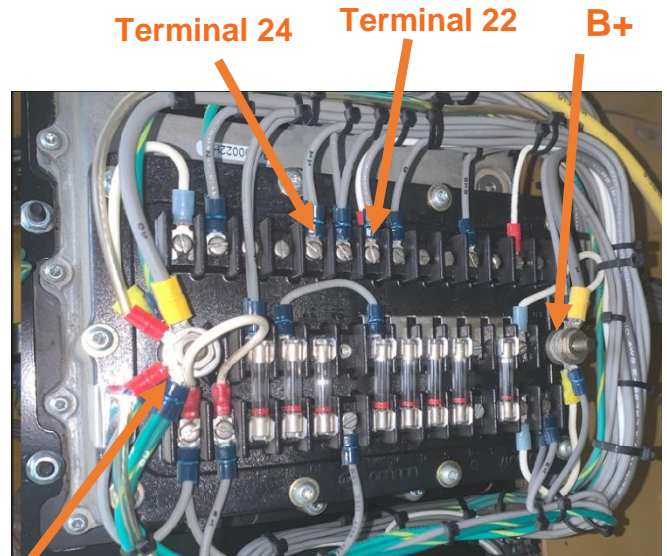

B-

Generac Gateway Side Termination	Description	Wire Color	Customer Side Terminations
TB1 V+	DC+	Red	B+
TB1 V-	DC-	Black	B-
TB2 DICOM	Input Common	Orange	B-
TB2 DI0	Engine Running	Purple	Terminal 24
TB2 DI1	Not in Auto	Dark Green	HOA - terminal 7
TB2 DI2	Common Alarm	White	Terminal 22
Harness Relay #1	COM	Blue	2 Wire Start** (Terminal 2)
	N/O	White / Blue	2 Wire Start** (Terminal 14)

\*If gateway power lights blink on gen crank, this can indicate a brief loss of power. To correct, ensure red and black wires connect directly to the battery posts.

